

Specifications and Installation

CagePod 2 (CP2)




ExoFit Outdoor Fitness Equipment


*****AFTER EQUIPMENT IS INSTALLED, REMOVE ALL FILM OFF LABELS*****

CAGEPOD 2 PARTS LIST:

- ECC 21-9** Swedish Ladder
- ECC 21-10** Leg Lift Station (3 parts)
- ECC 21-11** Column #4 (w/ attached step)
- ECC 21-12** Column #5
- ECC 21-13** Column #6 (w/ attached step)
- ECC 21-14** Cross Bar
- ECC 21-15** Cross Bar
- ECC 21-20** Back Extension
- ECC 21-21b** Spare Parts, Caps and Nut Protectors

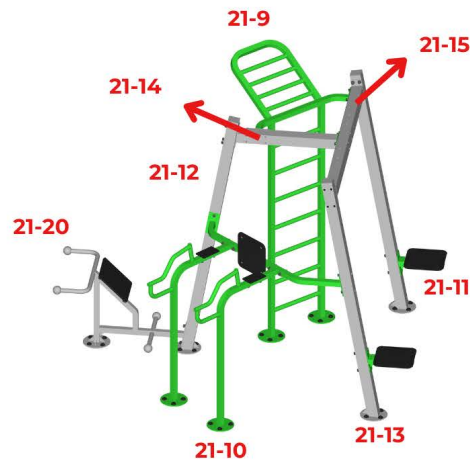


USE ZONE:

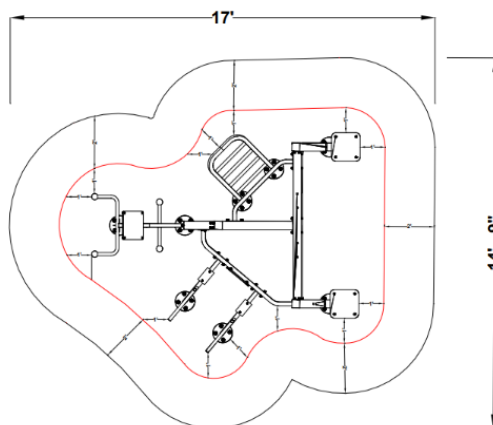

***** AFTER EQUIPMENT IS INSTALLED, REMOVE ALL FILM OFF LABELS *****


SURFACE MOUNT INSTALLATION:

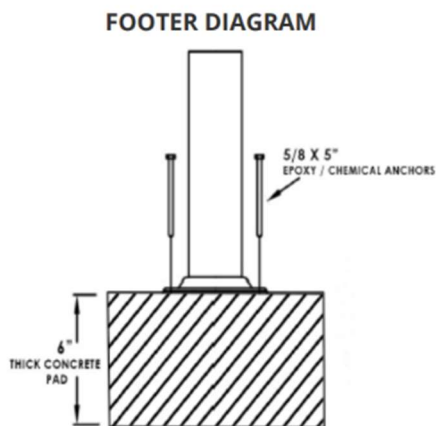

For best results, a 6" thick concrete pad is recommended.

5/8" x 5" Epoxy/Chemical Anchors are recommended for Surface Mount.
(epoxy anchors not included)


Bolt Caps

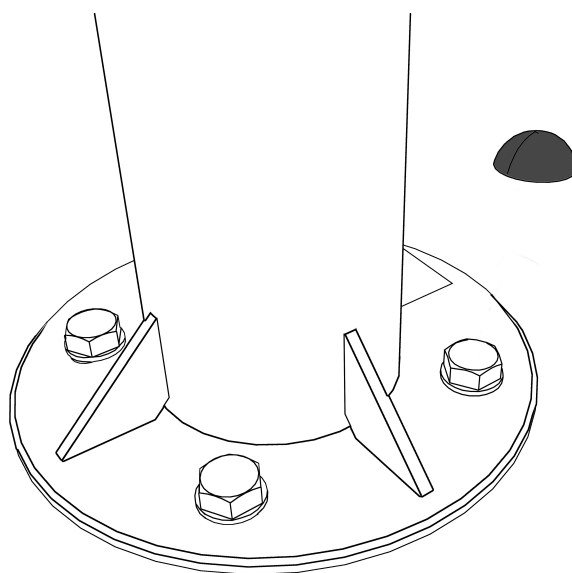

***** AFTER EQUIPMENT IS INSTALLED, REMOVE ALL FILM OFF LABELS *****

IN-GROUND MOUNT INSTALLATION:

Attach embedded anchors to the bottom of all posts first before putting them into footers. All bolts needed for in-ground installation of the embedded anchors are attached to the anchors.

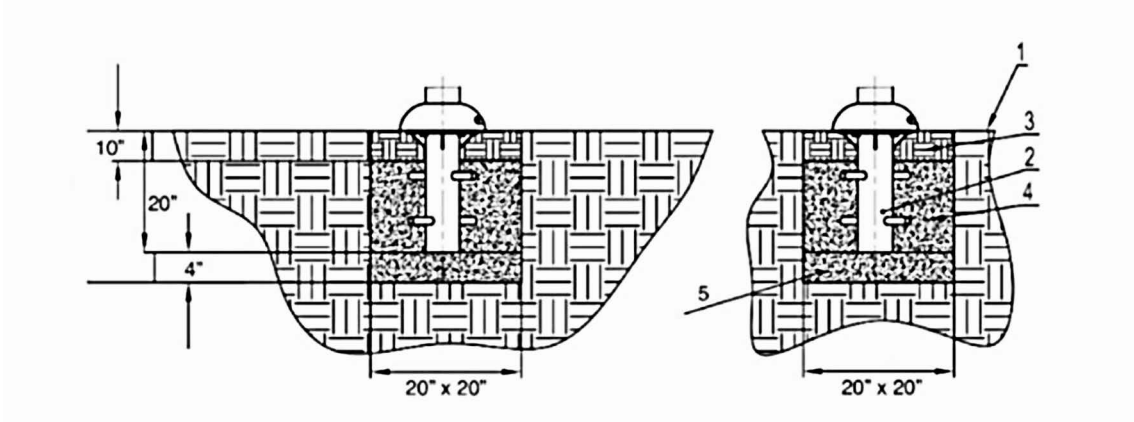

Ref	Name
1	Ground Level
2	Anchor
3	Topsoil
4	Concrete
5	Concrete Block

FOR SOFTER SOIL CONDITIONS, WE RECOMMEND 30" L x 30" W x 24" H.